查询S1117-15Q供应商

AUK Semiconductor

S1117AQ/S1117-xxQ

Adjustable and Fixed LDO Voltage Regulator

Descriptions

The S1117 series of positive adjustable and fixed regulators are designed to provide 1A with higher efficiency. All internal circuitry is designed to operate down to 1.3V input to output differential. On-chip trimming adjusts reference voltage to 2%

Features

- Adjustable or Fixed output
- Output Current of 1A
- Low Dropout, 1.3V maximum at 1A Output Current
- Thermal Shutdown Protection
- Fast Transient Response

Ordering Information

Type NO.	Marking	Package Code
S1117AQ/S1117xxQ	S1117□□Q/S1117□□□Q	SOT-223

□□:Voltage Code (Aj : 1.25V, 15:1.5V,:18: 1.8V, 25:2.5V, 33:3.3V, 50:5.0V)
□□□:Voltage Code (285:2.85V)

Outline Dimensions (Unit : mm)

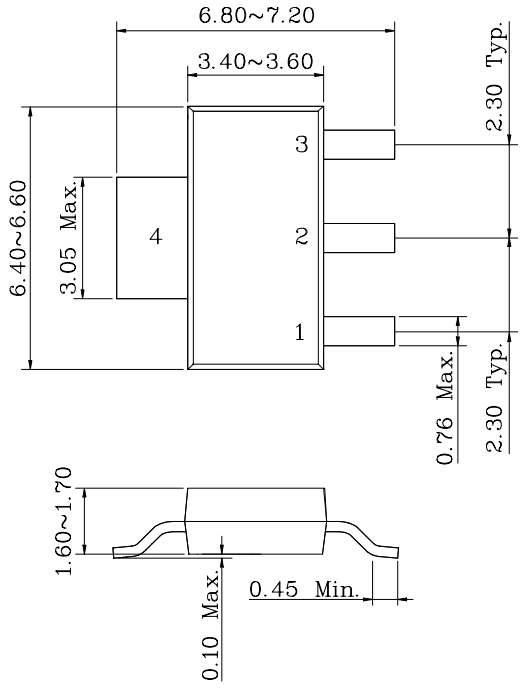

BLOCK DIAGRAM

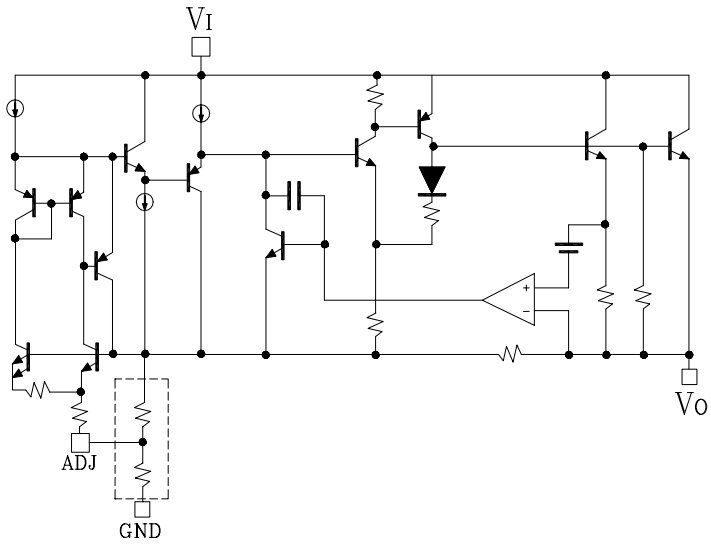

PIN Connections

1. GND/ADJ
2,4. Output voltage
3. Input voltage

Absolute Maximum Ratings

Ta=25°C

Characteristic	Symbol	Rating	Unit
Input Voltage	V_I	16	V
Power Dissipation	P_D1 (Note1)	1.5	W
	P_D2 (Note2)	0.8	
Junction Temperature	T_J	150	°C
Storage Temperature Range	T_{stg}	-55 ~ 150	°C

Note 1 : Mounted on a glass epoxy circuit board of 25.4 x 25.4mm. (at 1oz copper area)

Note 2 : No Heat sink

Device Selection Guide (NOTE3)

Device	Output Voltage
S1117AQ	Adjustable
S1117-15Q	1.5V
S1117-18Q	1.8V
S1117-25Q	2.5V
S1117-285Q	2.85V
S1117-33Q	3.3V
S1117-50Q	5.0V

Note 3 : Other fixed versions are available Vo=1.5V to 5V

Electrical Characteristics

(Electrical Characteristics at T_J = 25℃ and V_I=(V_O+1.5V), I_L=10 ㎃, C_O=10 ㎌ unless otherwise specified.)

Characteristic	Symbol	Device	Test Condition		Min	Typ	Max	Unit
Output Voltage	V_O	S1117A	V_I = (V_O+1.5V),I_O = 10 ㎃		1.225	1.25	1.275	V
			V_I = (V_O+1.5V) to 7V I_O = 0 to 1000 ㎃	*	1.200		1.300	
		S1117-15	V_I = (V_O+1.5V),I_O = 10 ㎃		1.470	1.5	1.530	
			V_I = (V_O+1.5V) to 7V I_O = 0 to 1000 ㎃	*	1.440		1.560	
		S1117-18	V_I = (V_O+1.5V),I_O = 10 ㎃		1.764	1.8	1.836	
			V_I = (V_O+1.5V) to 7V I_O = 0 to 1000 ㎃	*	1.728		1.872	
		S1117-25	V_I = (V_O+1.5V),I_O = 10 ㎃		2.450	2.5	2.550	
			V_I = (V_O+1.5V) to 7V I_O = 0 to 1000 ㎃	*	2.400		2.600	
		S1117-285	V_I = (V_O+1.5V),I_O = 10 ㎃		2.793	2.85	2.907	
			V_I = (V_O+1.5V) to 7V I_O = 0 to 1000 ㎃	*	2.736		2.964	
		S1117-33	V_I = (V_O+1.5V),I_O = 10 ㎃		3.234	3.3	3.366	
			V_I = (V_O+1.5V) to 7V I_O = 0 to 1000 ㎃	*	3.168		3.432	
		S1117-50	V_I = (V_O+1.5V),I_O = 10 ㎃		4.900	5.0	5.100	
			V_I = (V_O+1.5V) to 7V I_O = 0 to 1000 ㎃	*	4.800		5.200	
Line Regulation (Note4)	$\triangle V_{O(\triangle VI)}$	All	1.5V≤ V_I-V_O≤7V I_O=10 ㎃		-	5	10	㎷
Load Regulation (Note4)	$\triangle V_{O(\triangle IL)}$	All	V_I=(V_O+1.5V) I_O=10 ㎃ ~ 1000 ㎃		-	10	30	㎷
Quiescent Current	I_{QC}	All	V_I= V_O + 1.5V V_{ADJ}=0V	*	-	7	13	㎃
Minimum Load Current	$I_{L(MIN)}$	S1117A	V_I=(V_O+1.5V), V_O=0V	*		3	7	㎃
Adjust Pin Current	I_{ADJ}	S1117A	V_I = (V_O+1.5V) to 7V I_O = 10 ㎃	*		55	90	㎂
Dropout Voltage (Note6)	V_{DROP}	All	I_O =1000 ㎃	*	-	1.2	1.3	V
Ripple Rejection (Note5)	RR	All	V_I-V_O=1.5V, I_O=1000 ㎃ V_{Ripple}=1V_{P-P} , f=120 ㎐		60	72	-	dB
Current Limit	I_{LIMIT}	All	(V_I-V_O)=1.5V	*	1			A

The * denotes the specifications which apply over the full temperature range.

Note 4: Low duty pulse testing with Kelvin connections required.

Note 5: 120 ㎐ input ripple (C_{ADJ} for ADJ=25 ㎌)

Note 6: △ V_O = 1%

■ Typical Applications

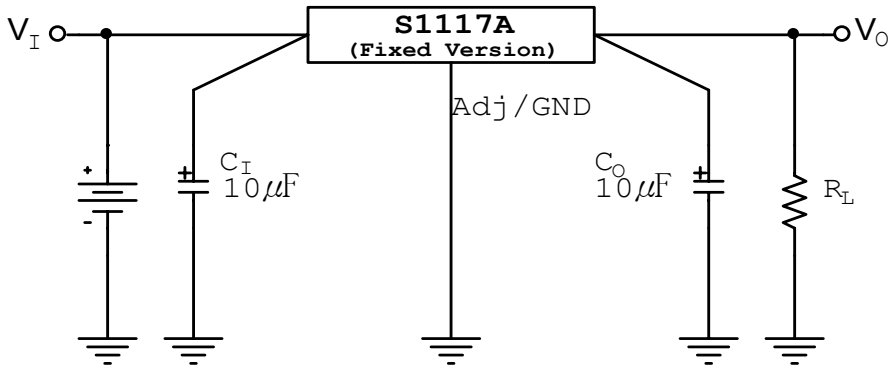

Fig. 1 Fixed Voltage Regulator

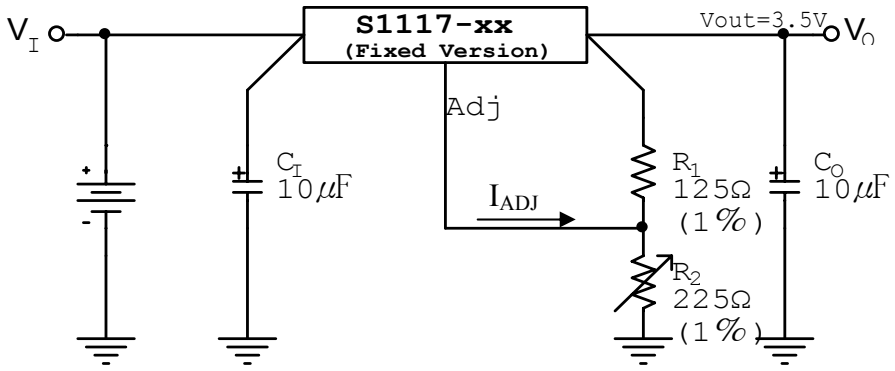

$V_O=V_{ADJ} * (1 + R_2/R_1) + I_{ADJ}*R_2$

Fig. 2 Adjustable Voltage Regulator

Notes:

1) C_I needed if device is far from filter capacitors

2) C_o minimum value required for stability

Electrical Characteristic Curves

Fig. 3 V_{DROP} vs. I_{OUT}

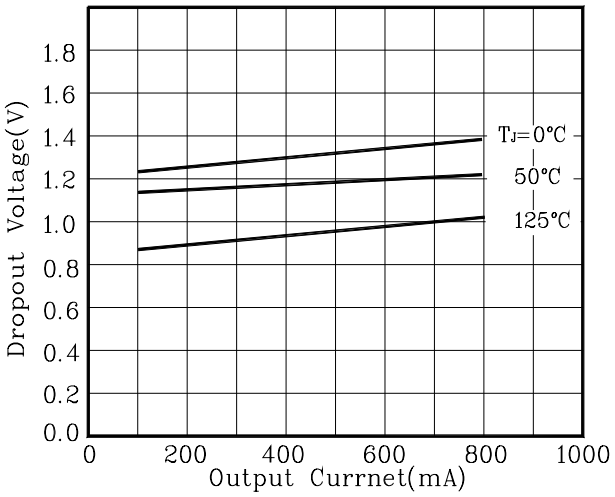

Fig. 4 ΔV_{OUT} vs. T_a

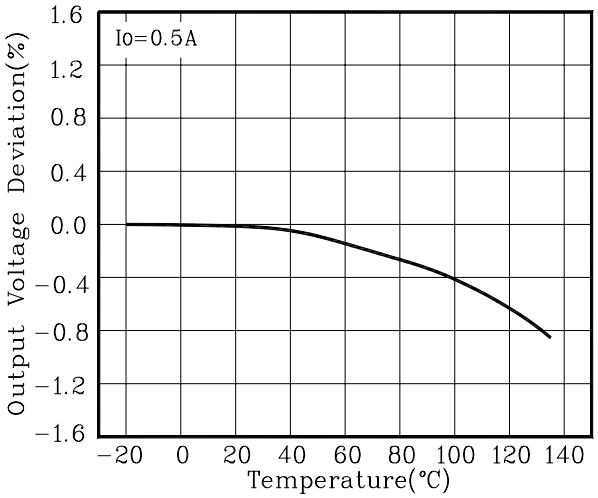

Fig. 5 RR vs. Frequency

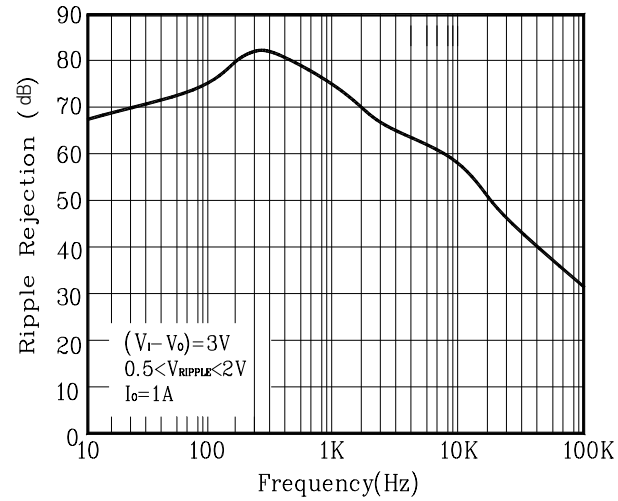

Fig. 6 Temperature Stability

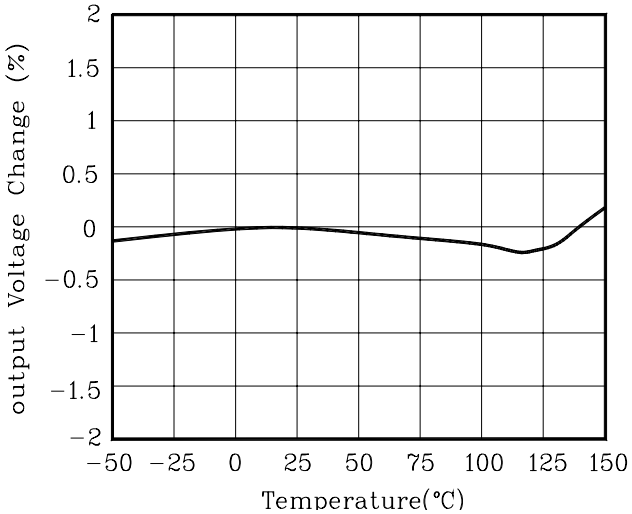

Fig. 7 I_{ADJ} vs. T_a

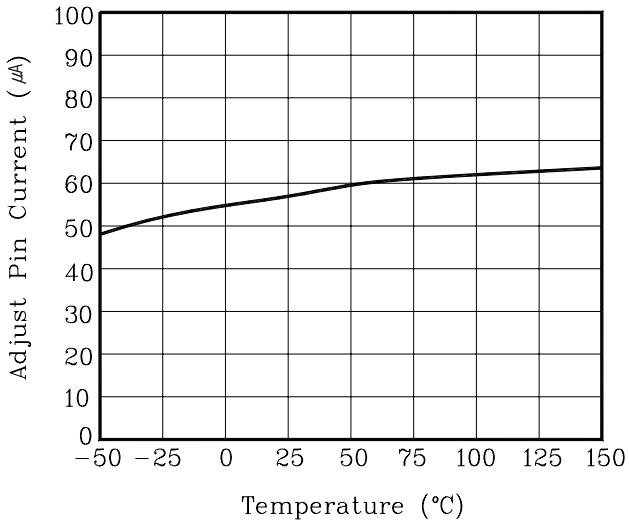

Fig. 8 P_D vs. T_a

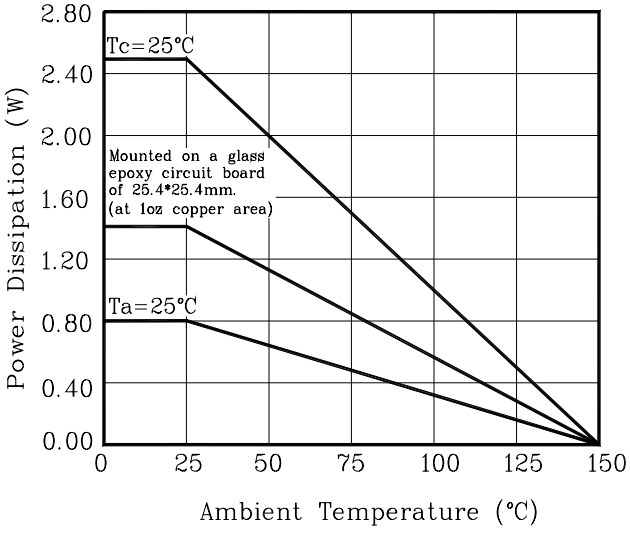
Tc=25℃
Mounted on a glass epoxy circuit board of 25.4*25.4mm. (at 1oz copper area)
Ta=25℃
Power Dissipation (W)
Ambient Temperature (℃)

These AUK Corp. products are intended for usage in general electronic equipment (Office and communication equipment, measuring equipment, domestic electrification, etc.) Please make sure that you consult with us before you use these AUK products in equipm- ents which require high quality and/or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, traffic signal, combustion central, all types of safety device, etc.) AUK cannot accept liability to any damage which may occur in case these AUK products were used in the mentioned equipments without prior consultation